

V6 Lite

Online digital printing of GHS labels

- Two colors in one machine
- Direct printing on the packaging
- Reduction of operational costs
- Print small texts
- Barcodes in GS-1 standard
- CLP labels
- End-of-line customization
- Digital printing for industry 4.0




CHARACTERISTICS

- Native resolution of 180dpi up to 60m/min
- Multiple densities and contrasts
- High quality bar codes. GS-1 standard
- Intuitive user environment
- Actual on-screen preview of the message to be printed (WYSIWYG)
- Oil based and UV LED inks
- Remote assistance
- External hardware message selection
- Integration with post-print bar code reader
- Scripting for full customisation of jobs

ADVANTAGES

- Customisation. Short print runs. Promotions
- Reduction of stock of pre-printed containers
- Practically zero maintenance
- No stoppages to change consumables

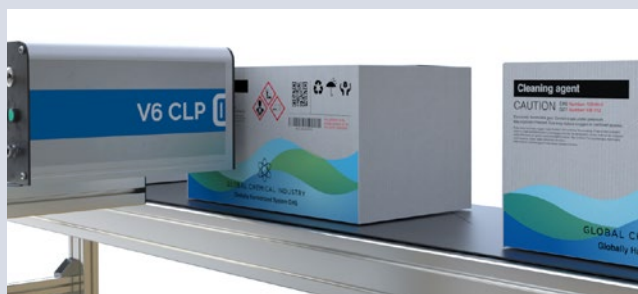

SPECIFICATIONS

PRINT

Print head resolution:

180 dpi

Speed:

0.2-192 m/min depending resolution

Height:

72 mm / 140 mm

Maximum length: +100 m.

Densities: 3 levels

Font type: True Type™, Open Type™ fonts

Character coding: Unicode

Bar codes: GS-1 standard

EAN/UPC, ITF-14, GS1-128, GS1 Data-matrix, GS1 QR Code

Printing of variable fields:

Of user (customised fields) and automatic fields (expiry dates, shift codes, counters)

Encoder:

Automatic speed calibration

ENVIRONMENTAL

Work environment:

5 - 45 °C (41 - 1113 °F)

Protection:

IP 50

COMMUNICATIONS

Own communications protocol

Windows™ Driver

Connectivity with external database and ERP Remote assistance

ELECTRICS

Power supply:

Selectable by switch
88-264VAC / 47-63 Hz, 108 W (max)

Inputs (per block):

1 x printing signal
1 x encoder

Outputs (per block):

2 x programmable
2 x status indicators

Communication ports:

1 x RS-232
1 x RS-422 / 485 / 232 (optional)
1 x Ethernet 1Gb
1 x USB
1 x WiFi (optional)

UV LED



Printing immediately sets Useful, long life span with low maintenance Energy efficient

Several heights available
Instant on/off
Safety through double activation input
Adjustable intensity

INKS

Oil-based and UV LED inks - MOF

Colors:

Black, Black (high contrast), Cyan, Magenta, Yellow, Others (consult)



USER INTERFACE

7" colour touchscreen
Selection of messages with preview
WYSIWYG
Diagnostics

OPTIONS

Post-printing bar code verification, alarm beacons, bar code reader for selecting products, external hardware message selection

PRINTABLE PRODUCTS

Porous, glossy, coated cardboard, paper, textiles, wood, plastic, metal, foam, EPS...

CONFIGURATIONS

V6 Lite 70:

180 dpi
70 mm
Mono



V6 Lite 140:

180 dpi
140 mm
Mono




V6 Lite CLP 70:

180 dpi
70/70 mm
2 Colors



Orientation options:

Lateral - Upjet - Downjet

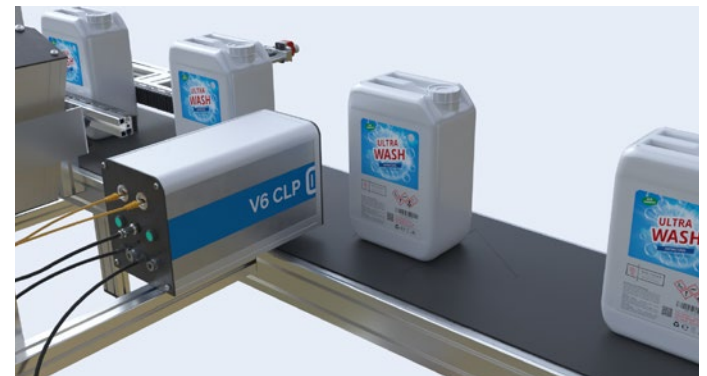

PYMEINNOVADORA



Tecnología de impresión digital en los cinco continentes

V.L. Limitronic, S.L.
Calle Andorra 19
Pol. Ind. Ciudad del Transporte II
12006 Castellón - Spain
Tel. (+34) 964 562 199
info@limitronic.com

Limitronic
ACTITUD SIN LIMITES

limitronic.com
linkedin.com/company/limitronic
youtube.com/Limitronic